

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number  
**WO 01/71849 A2**

(51) International Patent Classification<sup>7</sup>: **H01Q 1/38**,  
9/04, 25/00, 23/00, 21/06

Moniem: 23151 Verdugo Drive, Suite 103, Laguna Hills,  
CA 92653 (US).

(21) International Application Number: PCT/US01/08929

(74) Agents: **PATTERSON, William, B.** et al.; Thomason,  
Moser & Patterson LLP, 3040 Post Oak Boulevard, Suite  
1500, Houston, TX 77056 (US).

(22) International Filing Date: 20 March 2001 (20.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/190,686 20 March 2000 (20.03.2000) US  
60/245,838 3 November 2000 (03.11.2000) US  
09/812,701 20 March 2001 (20.03.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(71) Applicant: **SARNOFF CORPORATION** [US/US]; 201  
Washington Road, CN 5300, Princeton, NJ 08543 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors: **FATHY, Aly**; 452 White Swan Way,  
Langhorne, PA 19047 (US). **PERLOW, Stewart, M.**;  
4 Lawton Road, Marlboro, NJ 07746 (US). **ROSEN,**  
**Arye**; 508 Hartwood Road, Cherry Hill, NJ 08003 (US).  
**TAYLOR, Gordon, C.**; 246 Varsity Avenue, Princeton,  
NJ 08540 (US). **KANAMALURU, Sridhar**; 35 Haverford  
Road, W. Windsor, NJ 08550 (US). **EISHERBINY,**

**Published:**

— without international search report and to be republished  
upon receipt of that report

[Continued on next page]

(54) Title: RECONFIGURABLE ANTENNA

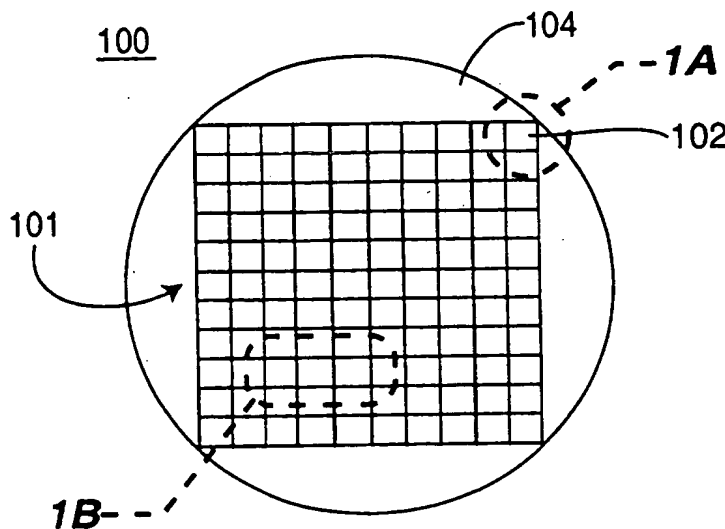

(57) Abstract: A reconfigurable antenna capable of dynamic reconfigurability of several antenna parameters. Specifically, the present invention is an antenna comprising a plurality of surface PIN devices arranged in a gridlike array. Each of the SPIN devices can be individually activated or deactivated. When a SPIN device is activated, the surface of the device is injected with carriers such that a plasma is produced within the intrinsic region of the device. The plasma can be sufficiently conductive to produce conductor or metal like characteristics at the surface of the device. Various ones of the SPIN devices can be activated to electronically paint a conductive pattern upon the substrate supporting the PIN devices. Through selective activation of the SPIN devices various surface antenna patterns can be produced upon the substrate including dipoles, cross

dipoles, loop antennas, Yagi-Uda type antennas, log periodic antennas, and the like. Additionally, the SPIN device grid may be selectively activated to produce holographic antennas. In a holographic antenna the SPIN devices are activated to produce a simulated metallization pattern that is excited by a surface RF wave transmitted onto the substrate from a surface mounted dipole antenna. The surface wave excites a particular antenna pattern depending upon the shape of the activated SPIN devices. Changing the pattern of the holographic antenna elements causes a beam steering and/or frequency adjustments of the antenna.

WO 01/71849 A2



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **RECONFIGURABLE ANTENNA**

### **CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims benefit of United States provisional patent applications serial number 60/190,686, filed March 20, 2000, and serial number 60/245,838, filed November 3, 2000, both of which are herein incorporated by reference.

This application contains subject matter related to United States patent application serial number \_\_\_\_\_, filed simultaneously herewith (Attorney docket SAR 14191), which is herein incorporated by reference.

### **BACKGROUND OF THE INVENTION**

#### **Field of the Invention**

The invention generally relates to antenna systems and, more particularly, the invention relates to a reconfigurable antenna.

#### **Description of the Related Art**

The detection, location, identification, and characterization of electromagnetic (EM) signals of types that have a low probability of intercept is an increasingly challenging problem. In general, EM signals with a low probability of intercept are transmitted by adversarial sources and thus employ various methods to reduce their signature. Such methods include frequency hopping, multiple signal polarizations, and spread spectrum encoding techniques. In addition, the locations of the sources of such signals are not fixed and may change quite rapidly. The number of sources or EM signals that need to be located and tracked may also change depending on the particular circumstances.

A broadband antenna is generally required in order to track such EM signals. Frequency independent antennas such as spirals and quasi frequency independent antennas such as log periodic antennas are quite large and their use in antenna array is quite limited. Also, an adaptive array using such broadband elements would require a feed structure integrated to a true time delay network in order to achieve multiple beams and beam scanning. Such feed networks are difficult to design and are expensive to implement.

Therefore, there exists a need in the art for a reconfigurable antenna capable of dynamic reconfiguration of operating frequency, polarization, bandwidth, number of beams and their spatial directions, and radiation pattern shape without the need for a complex feed network.

### **SUMMARY OF THE INVENTION**

The disadvantages associated with the prior art are overcome by a reconfigurable antenna capable of dynamic reconfigurability of several antenna parameters.

Specifically, the present invention is an antenna comprising a plurality of surface PIN (SPIN) devices arranged in a gridlike array. Each of the SPIN devices in the array can be individually activated or deactivated. When a SPIN device is activated, the surface of the device is injected with carriers such that a plasma is produced within an intrinsic region of the SPIN device. The plasma is sufficiently conductive to produce conductor or metal-like characteristic at the surface of the device. Various ones of the SPIN devices in a SPIN device array can be activated to electronically "paint" a conductive pattern upon the substrate supporting the SPIN devices. Through selective activation of the SPIN devices, various surface antenna patterns can be produced upon the substrate including dipoles, cross dipoles, loop antennas, Yagi-Uda type antennas, log periodic antennas, and the like.

Additionally, the SPIN device array may be selectively activated to produce holographic antennas. In a holographic antenna, the SPIN devices are activated to produce a holographic metallization pattern. The pattern is excited by a surface RF wave transmitted onto the substrate from a surface mounted radiator such as a surface mounted dipole antenna. The surface wave excites a particular antenna pattern depending upon the shape of the pattern produced by the activated SPIN devices. Changing the pattern of the SPIN devices results in beam steering of the antenna radiation pattern.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

So that the manner in which the above recited features of the present invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiments thereof which are illustrated in the appended drawings.

It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

Teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

Figure 1 depicts a top plan view of a reconfigurable antenna in accordance with the present invention;

Figure 2 depicts a top plan view of a dipole antenna that is generated by configuring the reconfigurable antenna of Figure 1;

Figure 3 depicts a top plan view of a loop antenna generated by configuring the reconfigurable antenna of Figure 1;

Figure 4 depicts an ideal holographic metallization pattern for a holographic antenna;

Figure 5 depicts an array approximation for the holographic pattern of Figure 4;

Figure 6 depicts a top plan view of a holographic antenna;

Figure 7 depicts a side view of the holographic antenna of Figure 6;

Figure 8 depicts an perspective, exploded view of a holographic antenna;

Figure 9 depicts an array pattern for a particular holographic antenna;

Figure 10 depicts the radiation pattern generated by the array pattern of Figure 6;

Figure 11 depicts an array pattern for a particular holographic antenna; and

Figure 12 depicts a radiation pattern for the array pattern of Figure 8.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

Figure 1 depicts a top plan view of a reconfigurable antenna 100 comprising a plurality of surface PIN (SPIN) devices 102 fabricated as an array 101 upon a substrate 104. Each of the SPIN devices 102, as shown in detailed view 1B of FIG. 1, comprises a P+ region 104 and N+ region 108 separated by an intrinsic region 106. A conductive

contact 110 is provided for the P+ region 104 and a conductive contact 112 is provided for the N+ region 108. These contacts 110 and 112 provide a contact point for a DC bias voltage that is used to activate and deactivate each of the SPIN devices. Each device in the array has such contacts such that each device can be activated and deactivated individually. One technique for fabricating a surface PIN device array is disclosed in detail in United States patent application serial number \_\_\_\_\_, filed simultaneously herewith (Attorney Docket No. SAR 14191) and herein incorporated by reference.

In one embodiment of the invention, as depicted in detailed view 1B of FIG. 1, a plurality of SPIN devices 102 are arranged in series, where adjacent SPIN devices have their respective P+ and N+ regions 104 and 108 connected by a conductive island (metal bridge) 118. As such, the "end" P+ and N+ regions 114 and 116 have the contacts 110 and 112. The contacts 110 and 112 are respectively connected to positive and negative terminals of a DC power supply to activate all the series connected SPIN devices 102. The number of SPIN devices 102 connected in this manner defines a pixel 120 having a "pixel" resolution for an antenna that is produced by the activated SPIN devices 102. In other embodiments of the invention, other connective combinations of SPIN devices could be used to define the "pixels" including parallel and series/parallel combinations. Such arrangements reduce the number of connective leads or pins that need to be used to supply DC bias to the array 101.

Figure 2 depicts a top plan view of the antenna 100 having been configured to produce a dipole antenna 200. The dipole antenna 200 is created by activating a plurality of SPIN devices 202 through 202<sub>8</sub> such that each half of the dipole antenna 200 has a length of one quarter wavelength. The RF source 208 is applied to the innermost SPIN devices 202<sub>4</sub> and 202<sub>5</sub>. If the frequency of the RF source 208 were to change, the dipole 200 could be lengthened by activating additional SPIN devices such as 202<sub>0</sub> and 202<sub>9</sub>, or shortened by deactivating the end SPIN devices 202<sub>1</sub> and 202<sub>8</sub>. As such, the dipole 200 can be dynamically reconfigured to accommodate various frequency sources.

Similarly, Figure 3 depicts a dipole loop antenna 300 configured by activating various SPIN devices to form a loop shaped structure on the surface of the substrate 104. The RF source is applied to the ends of the loop at SPIN devices 302 and 304.

In a similar manner, other antenna structures including antenna arrays such as Yagi-Uda antenna arrays and log periodic antenna arrays can be fabricated by activating and deactivating certain ones of the SPIN devices. The groupings of devices that are activated operate like a metallization pattern on the surface of the substrate such that some of the activate device areas can be driven with an RF voltage while others operate as reflector elements and director elements within the antenna structure. In this manner, any surface-mount antenna structure can be created on the substrate 104 by activating and deactivating various ones, or combinations thereof of the SPIN devices 102 of the array 101.

It is known from a paper by Iizuka et al. ("Volume-Type Holographic Antenna", IEEE Trans. on Antennas and Propagation, Nov. 1975, pp. 807-810) that a holographic plate may be used as a beam shaping antenna. Such a plate enables a desired aperture distribution across the hologram to be derived from a given illumination incident from a primary feed. In general, at microwave and millimeter wave frequencies, a hologram can be approximated by an appropriate metallization pattern etched on a printed circuit board. In general, the use of a metal pattern will permit a close approximation of the desired phase distribution across the entire aperture. The Iizuka et al. paper describes an antenna that consists of a holographic plate having a metallization pattern illuminated by a spherical wave originating from a horn antenna. The holographic pattern in this case consists of a set of concentric circular rings spaced one wavelength apart from one another. When the plate is illuminated by a spherical wave radiated from the horn aperture, the wave scattered from the metal rings have the same phase (same wave phase front), creating two beams travelling in opposite directions normal to the plate surface, i.e., the true image and its conjugate are thereby reconstructed in a holographic sense. When two plates are used in a parallel arrangement, the pattern in the second plate and its spacing can be designed in such a way that the backward radiation is canceled and the forward beam radiation is reinforced. For example, if the plates are spaced a quarter wavelength apart, and the metal rings on the second plate have a radii of a quarter wavelength larger than those of the first plate. The desired interference pattern will be achieved.

Beam shaping is possible by modifying the metallization pattern of the plates. Additionally, the spacing of the plates can be adjusted to achieve a particular radiation pattern.

Figure 4 depicts a top plan view of an ideal hologram pattern 400 for a particular antenna type. The antenna operates at 35 GHz and produces a Gaussian beam having a beamwidth of three degrees. This transmittance pattern is developed using continuous levels such that the light bars 402 represent areas of conductivity and the dark bars 406 represent areas of nonconductivity. The feed is provided in the center at reference 404.

Figure 5 depicts a binary representation 500 of the pattern of Figure 4. The binary representation is developed by a plurality of lines of SPIN devices (shown in detail at 502) as discussed above with reference to Figure 1. These devices 504 have dimensions that define a rectangular plan form, where the dimension of each SPIN device is small relative to the RF wavelength used to excite the antenna, i.e., approximately 50microns wide and 100 microns long. The white rows of devices 504 are the active devices and the black rows 506 are inactive devices. By selectively activating and deactivating devices, the hologram pattern 400 of Figure 4 is approximated by the hologram 500 of Figure 5. Consequently, the devices act as a metallization pattern to facilitate generation of a radiation pattern when the hologram is excited by an RF surface wave as shall be discussed below.

Figure 6 depicts a top plan view of a practical implementation of the reconfigurable holographic antenna 600 of the present invention. Figure 7 depicts a side view of the antenna 600 of Figure 6 and Figure 8 depicts an exploded view of the antenna of Figure 6. To best understand the invention, Figures 6, 7 and 8 should be referred to simultaneously. The antenna 600 comprises an array of SPIN devices 702 that are activated (represented by arcs 704) and deactivated (represented by white spaces 706) by the application of the DC voltage to each SPIN device. The DC voltage is supplied from an antenna base 708 (a circuit board) having the addressing circuitry 800 that couples DC power to a plurality of bias pins 710 that pass through a dielectric material 712 to contact each of the contact regions of each SPIN device. The dielectric material 712 is, for example, beryllium, low temperature, cold fired ceramic, or other insulating material that is structurally sufficient to retain the bias pins 710. When certain ones of the SPIN devices are activated, a pattern (arcs 704) is produced on the surface of the active silicon wafer 714.

A dielectric layer 716 is mounted on top of the active silicon wafer 714 and a feed dipole 718 is located atop the dielectric layer 716. The dielectric layer 716 is a composite



substrate fabricated, for example, of silicon and glass, silicon and quartz, or other materials that can facilitate propagation of a surface wave as discussed below. The dielectric layer 716 is not depicted in Figure 6 to facilitate showing the holographic pattern formed by the active SPIN devices. The feed dipole 718 is deposited by conventional metallization techniques such as physical vapor deposition of aluminum or copper. The feed dipole is generally coupled through a balun (not shown) to an RF transmitter or receiver. Alternatively, a RF horn feed structure can be used instead of a dipole. The horn excites a surface wave in the dielectric layer 716 in a manner similar to that of the dipole. The horn is generally coupled to a transmitter or receiver by a waveguide.

An absorbing ring 720 circumscribes the entire structure to absorb RF energy that propagates across the surface of the dielectric 716 towards the edge of the antenna structure 600. The absorbing ring 720 is fabricated of a "lossy" material such as resistive paint. To insure that the devices 702 operate as a metallization pattern, the size of each device should be less than  $\lambda/10$  where  $\lambda$  is the radiation wavelength that is applied to the dipole 718. By placing the dipole 718 on the dielectric 716, the RF energy is efficiently coupled from the dipole 718 to the active SPIN devices 704 that form secondary radiators of the holographic pattern. In this structure, the energy generated by the primary feeder, i.e., the dipole 718, is guided along the dielectric surface as a surface wave and the spurious radiation load can be effectively suppressed by the surrounding dielectric with the absorbing ring 720. The absorbing ring dissipates the radiation signal which escapes coupling to the secondary radiators and suppresses the spurious lobe by preventing surface wave diffraction over the edges of the antenna 600.

Bias is provided to the SPIN devices 702 via a plurality of bias pins 710 mounted in a low dielectric constant material 712. The conductive pins are directed normal to the semiconductor surface of the backside of the antenna 600. This arrangement takes advantage of the fact that the primary radiation field is polarized parallel to the antenna surface. Thus, vertically mounted pins would not substantially disturb the field. Moreover, in view of the fact that the surface wave field is highly localized near the surface of the dielectric 716, the biasing pins need not be very long to effectively separate the control electronics from the RF radiation. The pins are in contact with both of the contacts (110 and 112 in Figure 1) of the doped semiconductor regions and the

control circuits on the addressing board 708. In other words, the bias pin layer (dielectric 712 and pins 710) is sandwiched between the mounted semiconductor layer 714 and the control board 708. The control board 708 is, for example, a multilayer, cofired ceramic circuit using a mature ceramic technology. Other forms of circuit boards are known to those skilled in the art and may be substituted for the ceramic circuit.

Figure 9 depicts a holographic pattern 900 formed by activating certain SPIN devices to form arcs 902 and used to develop a particular radiation pattern for an antenna. Figure 10 depicts a particular radiation pattern 1000 generated by the holographic pattern 900 of Figure 9. Note that the location of the main lobe 1002 of the antenna radiation pattern 1000 is directed to the center of the image, i.e., the elevation and azimuth of the beam are both 0 degrees. By changing the bias to the SPIN devices and selecting other SPIN devices to change the holographic pattern, the direction of the main lobe of the radiation pattern can be moved and pointed in a controlled manner.

Figure 11 depicts an altered holographic pattern 1100 from that of the pattern 900 of Figure 9. This new holographic pattern 1100 offsets the main lobe 1202 of the radiation pattern 1200 to the right of the center as depicted in Figure 12. Using the pattern 1000 of Figure 11, the azimuth of the main lobe 1202 is now 15 degrees. Consequently, it can clearly be seen that a simple change in the number and pattern of SPIN devices that are active within the array can steer the antenna's main lobe from location to location. Similar adaptations can be made to match the antenna to various frequency changes as well as alter the polarization of the antenna.


While foregoing is directed to the preferred embodiment of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

**Claims:**


1. A reconfigurable antenna comprising:  
a substrate;  
a plurality of surface PIN devices supported by said substrate; and  
a feed element for coupling energy to said surface PIN devices.
2. The reconfigurable antenna of claim 1 wherein said substrate is a semiconductor substrate.
3. The reconfigurable antenna of claim 1 wherein said plurality of surface PIN devices are arranged in an array.
4. The reconfigurable antenna of claim 1 wherein the feed element is at least one surface PIN device.
5. The reconfigurable antenna of claim 1 wherein the feed element is a dipole antenna.
6. The reconfigurable antenna of claim 1 further comprising:  
a base comprising drive electronics; and  
a dielectric layer containing conductive pins that couple bias signals from the base to the surface PIN devices.
7. The reconfigurable antenna of claim 1 further comprises:  
a dielectric layer positioned atop the substrate; and  
wherein the feed element is a dipole antenna mounted to a surface of the dielectric layer.
8. The reconfigurable antenna of claim 1 wherein a selection of the plurality of surface PIN devices are activated to form a holographic antenna.
9. The reconfigurable antenna of claim 8 wherein a different selection of the

plurality of surface PIN devices are activated to form a different holographic antenna.


1/6

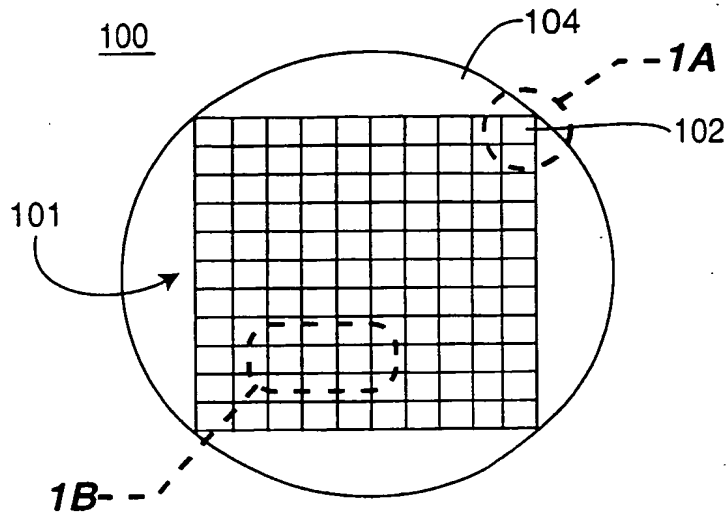

**FIG. 1**

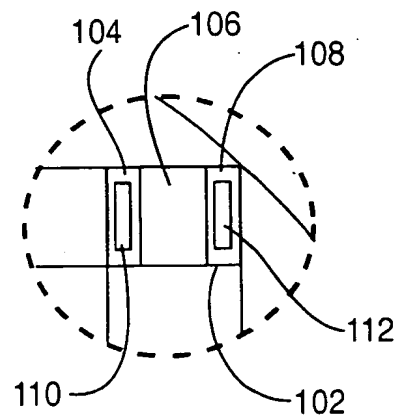


**FIG. 1A**

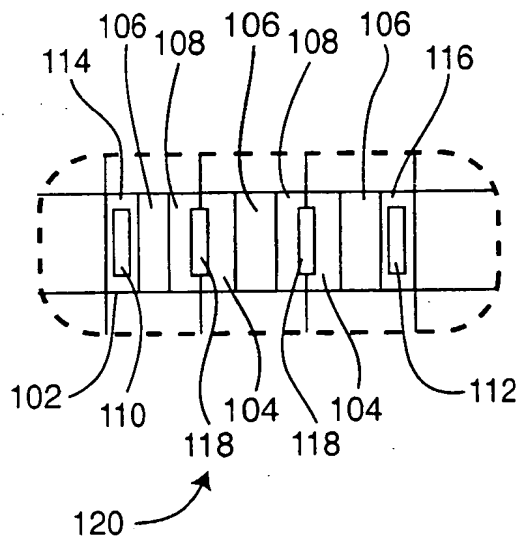


**FIG. 1B**


2/6

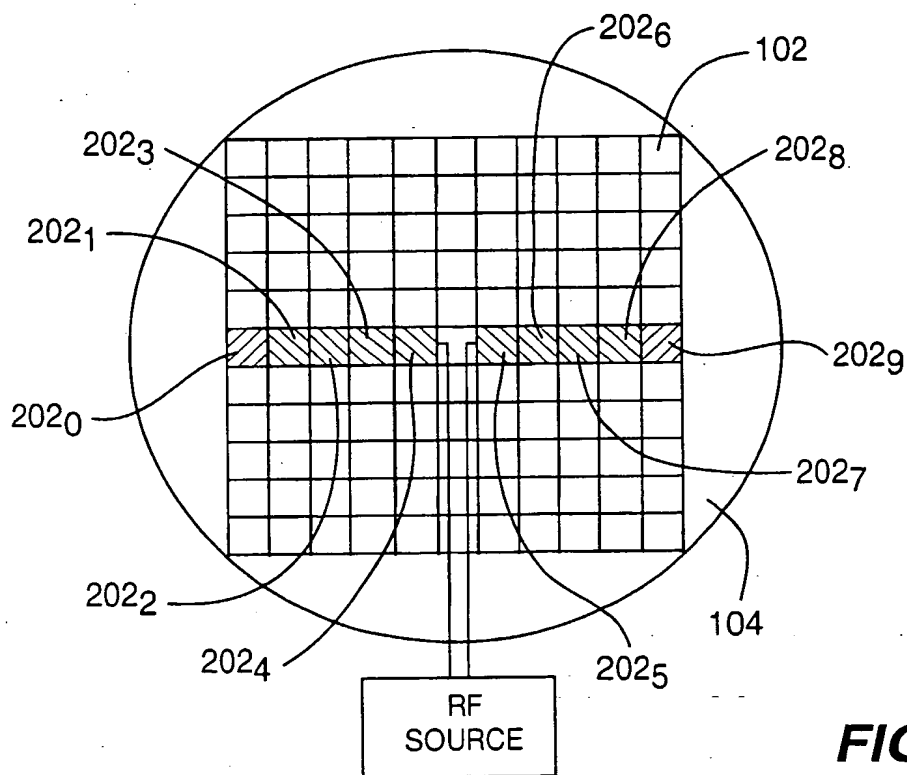


**FIG. 2**

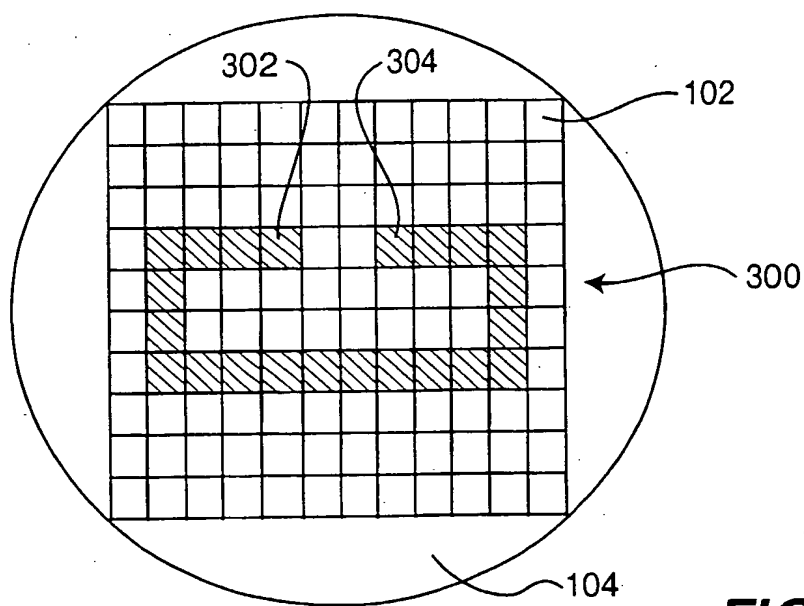




**FIG. 3**

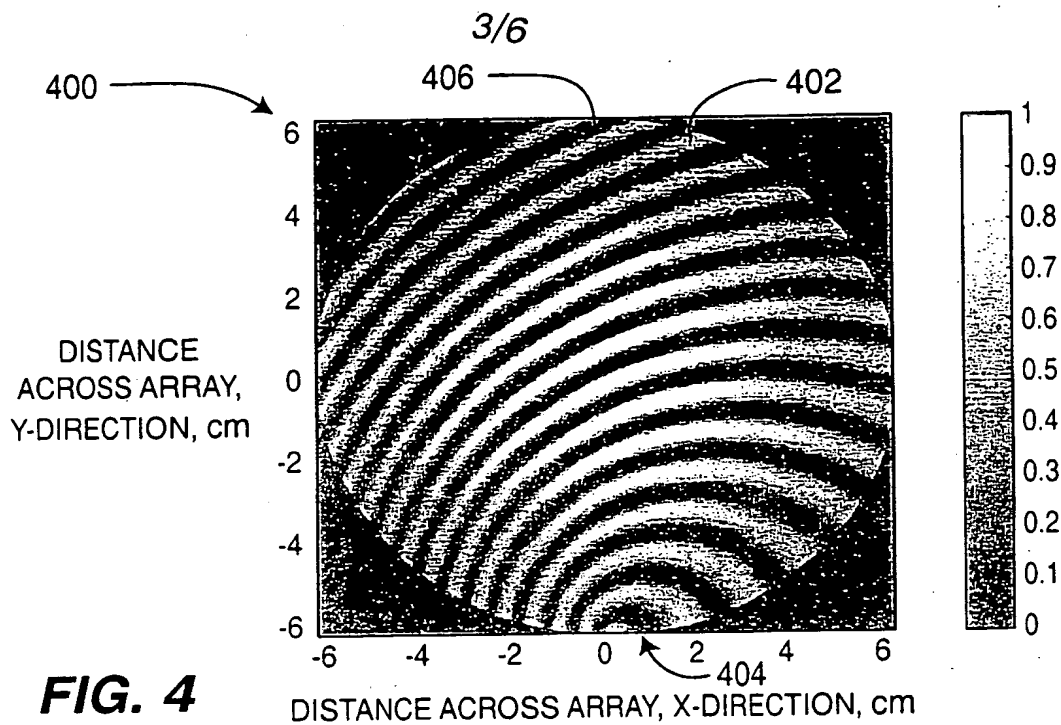



**FIG. 4**

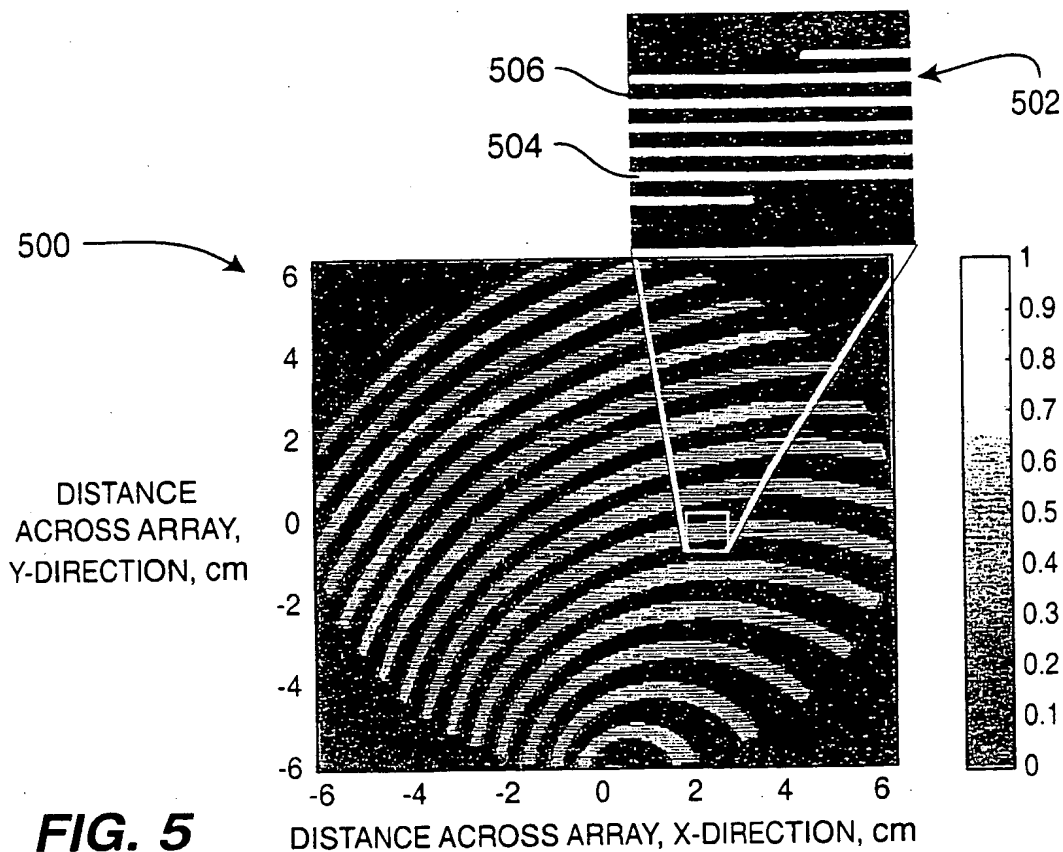



**FIG. 5**

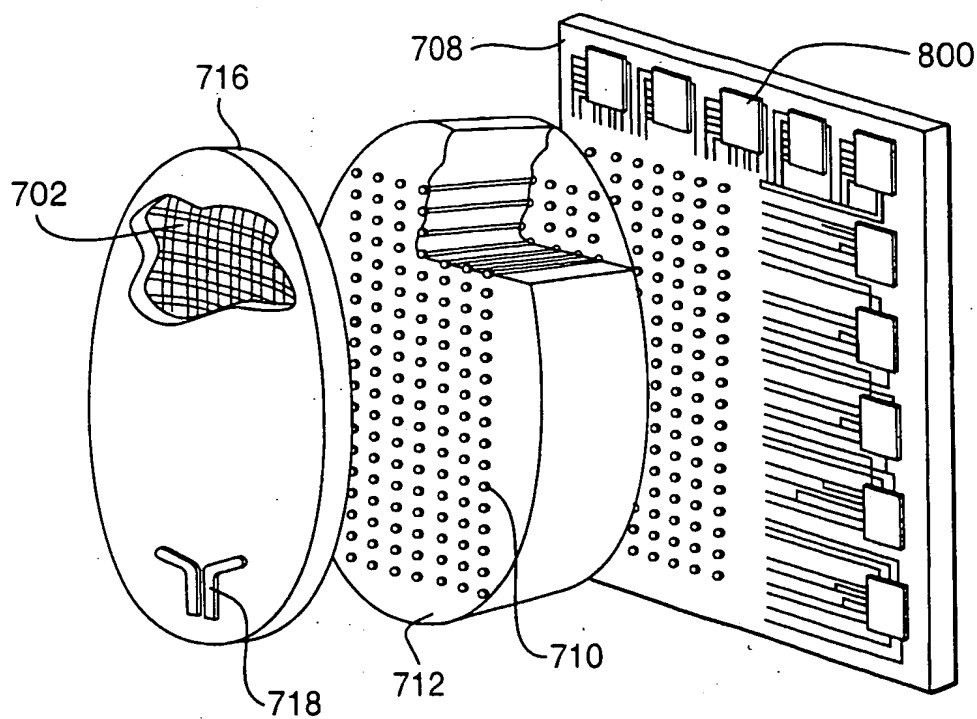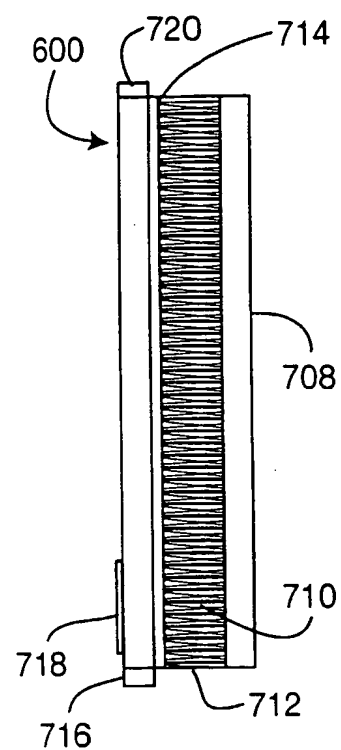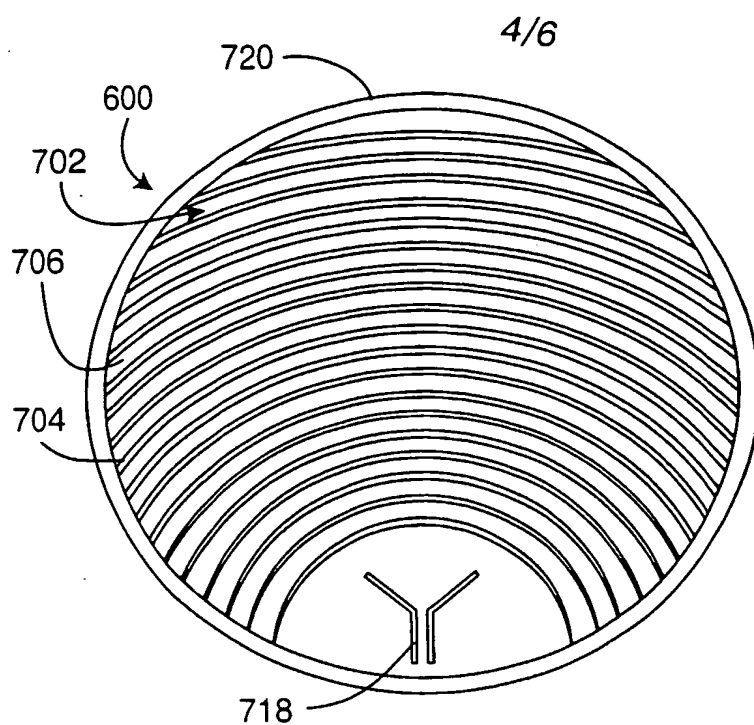

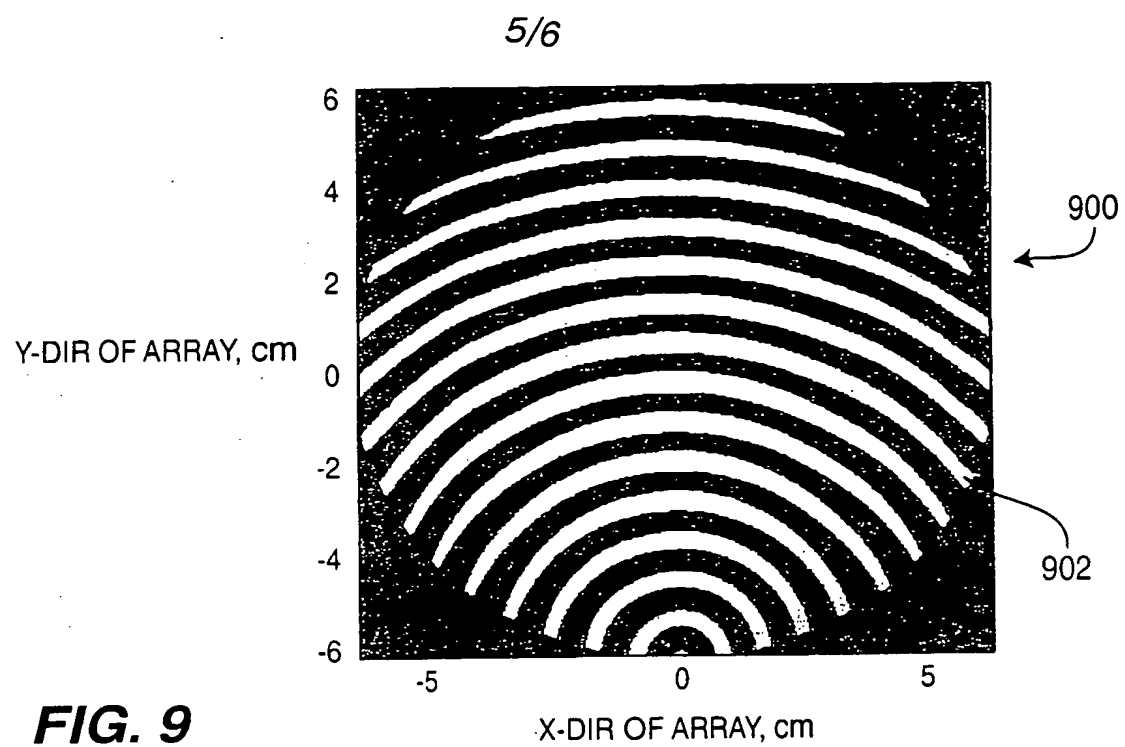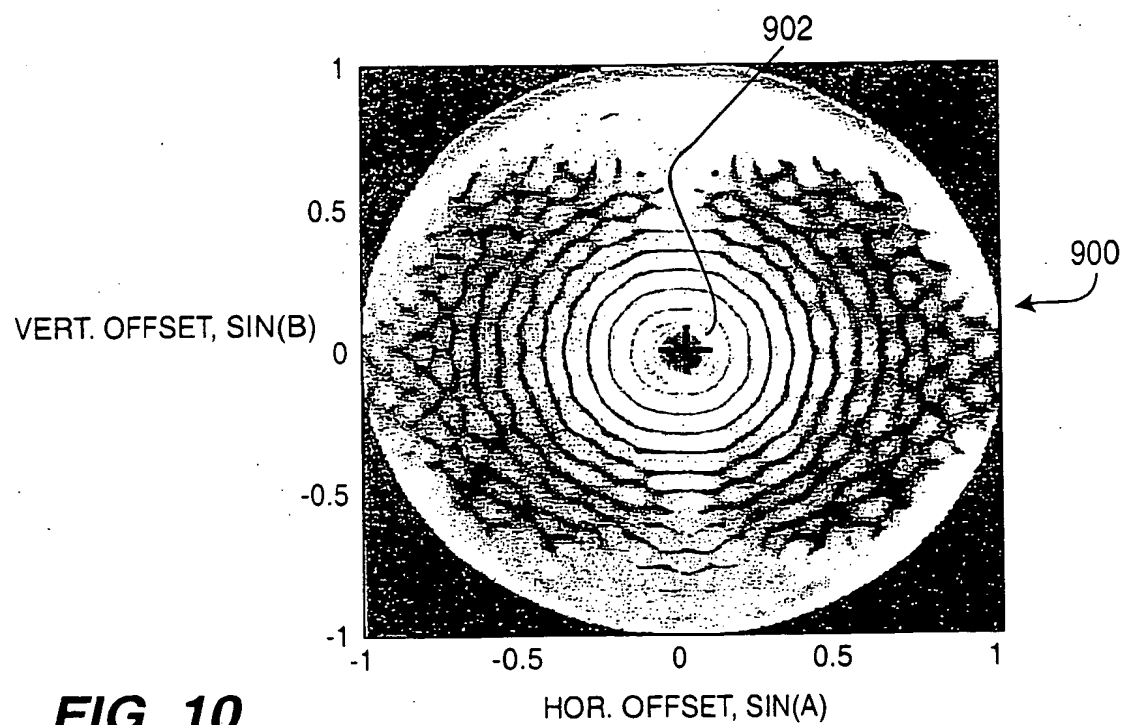

**FIG. 9****FIG. 10**

6/6

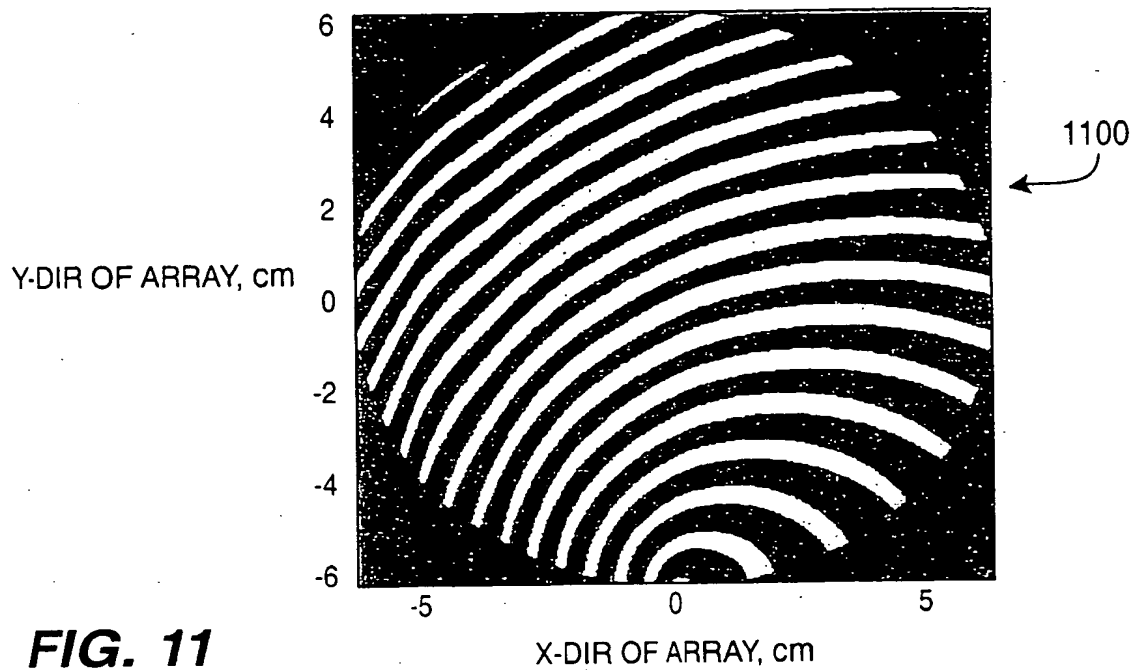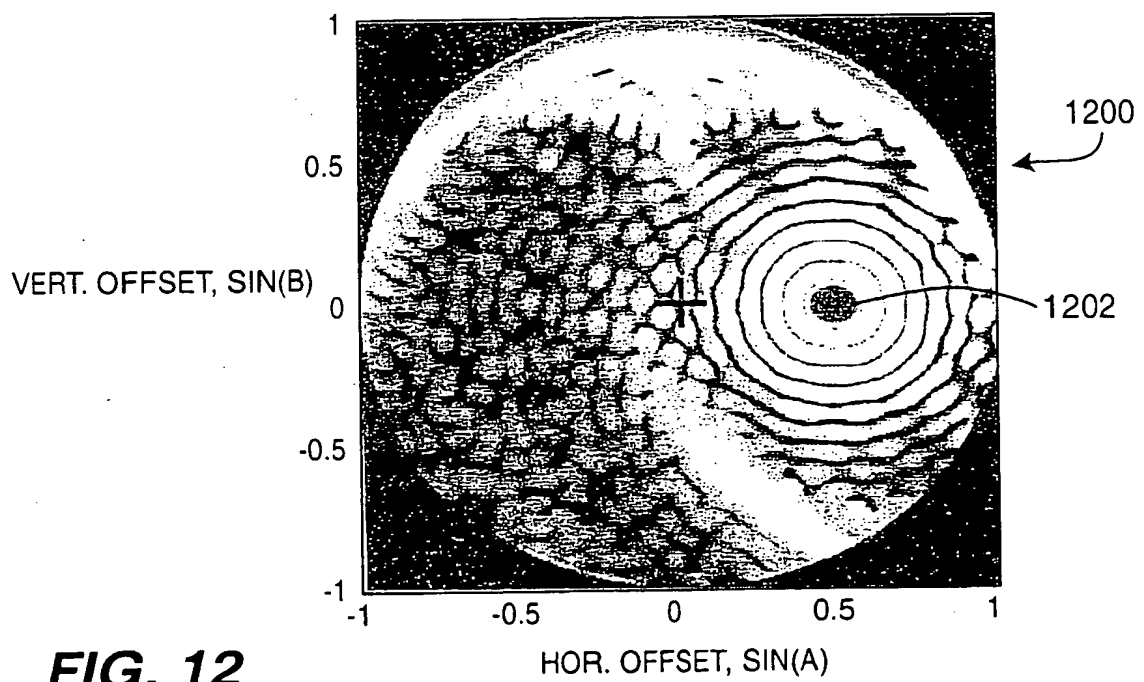**FIG. 11****FIG. 12**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number  
**WO 01/71849 A3**

(51) International Patent Classification<sup>7</sup>: **H01Q 1/38**,  
9/04, 25/00, 23/00, 21/06

Moniem; 23151 Verdugo Drive, Suite 103, Laguna Hills,  
CA 92653 (US).

(21) International Application Number: PCT/US01/08929

(74) Agents: **PATTERSON, William, B.** et al.; Thomason,  
Moser & Patterson LLP, 3040 Post Oak Boulevard, Suite  
1500, Houston, TX 77056 (US).

(22) International Filing Date: 20 March 2001 (20.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/190.686 20 March 2000 (20.03.2000) US  
60/245.838 3 November 2000 (03.11.2000) US  
09/812.701 20 March 2001 (20.03.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(71) Applicant: **SARNOFF CORPORATION** [US/US]; 201  
Washington Road, CN 5300, Princeton, NJ 08543 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors: **FATHY, Aly**; 452 White Swan Way,  
Langhorne, PA 19047 (US). **PERLOW, Stewart, M.**;  
4 Lawton Road, Marlboro, NJ 07746 (US). **ROSEN,**  
**Arye**; 508 Hartwood Road, Cherry Hill, NJ 08003 (US).  
**TAYLOR, Gordon, C.**; 246 Varsity Avenue, Princeton,  
NJ 08540 (US). **KANAMALURU, Sridhar**; 35 Haverford  
Road, W. Windsor, NJ 08550 (US). **EISHERBINY,**


Published:

— with international search report

(88) Date of publication of the international search report:  
21 March 2002

[Continued on next page]

(54) Title: RECONFIGURABLE ANTENNA

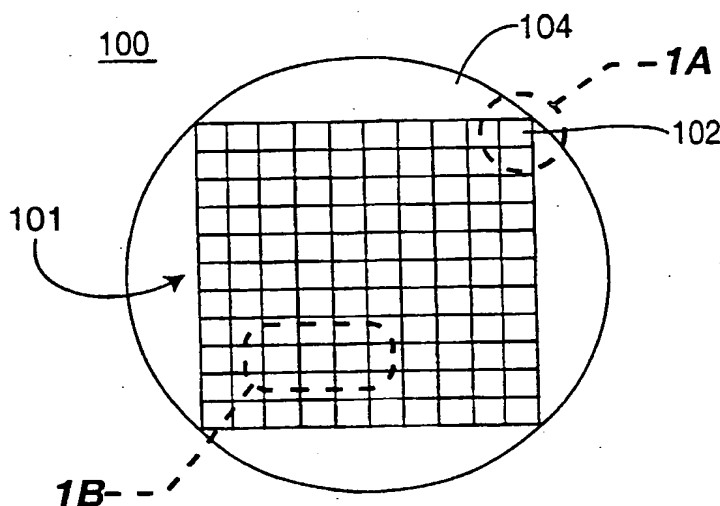

(57) Abstract: A reconfigurable antenna capable of dynamic reconfigurability of several antenna parameters. Specifically, the present invention is an antenna comprising a plurality of surface PIN devices arranged in a gridlike array. Each of the SPIN devices can be individually activated or deactivated. When a SPIN device is activated, the surface of the device is injected with carriers such that a plasma is produced within the intrinsic region of the device. The plasma can be sufficiently conductive to produce conductor or metal like characteristics at the surface of the device. Various ones of the SPIN devices can be activated to electronically paint a conductive pattern upon the substrate supporting the PIN devices. Through selective activation of the SPIN devices various surface antenna patterns can be produced upon the substrate including dipoles, cross dipoles, loop antennas, Yagi-Uda type antennas, log periodic antennas, and the like. Additionally, the SPIN device grid may

be selectively activated to produce holographic antennas. In a holographic antenna the SPIN devices are activated to produce a simulated metallization pattern that is excited by a surface RF wave transmitted onto the substrate from a surface mounted dipole antenna. The surface wave excites a particular antenna pattern depending upon the shape of the activated SPIN devices. Changing the pattern of the holographic antenna elements causes a beam steering and/or frequency adjustments of the antenna.

WO 01/71849 A3



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/US 01/08929

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01Q1/38 H01Q9/04 H01Q25/00 H01Q23/00 H01Q21/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 745 082 A (ALDER CHRISTOPHER J) 28 April 1998 (1998-04-28) the whole document ---	1-7
X	US 5 444 454 A (WHITE JOSEPH F) 22 August 1995 (1995-08-22) the whole document ---	1-4,6
A	US 4 521 781 A (CAMPI MORRIS ET AL) 4 June 1985 (1985-06-04) abstract ---	1-9
E	WO 01 80258 A (STANDARD MEMS INC ; TRIMMER WILLIAM (US)) 25 October 2001 (2001-10-25) the whole document --- -/-	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### Special categories of cited documents

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*G\* document member of the same patent family

Date of the actual completion of the international search

17 December 2001

Date of mailing of the international search report

28/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Wattiaux, V

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/08929

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication where appropriate, of the relevant passages	Relevant to claim No.
E	<p>WO 01 71819 A (SARNOFF CORP)  27 September 2001 (2001-09-27)  abstract</p> <p>-----</p>	1-4,6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCI/US 01/08929

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5745082	A	28-04-1998	CA 2166110 A1	05-01-1995
			CN 1128586 A ,B	07-08-1996
			DE 69412264 D1	10-09-1998
			DE 69412264 T2	17-12-1998
			EP 0705486 A1	10-04-1996
			WO 9500982 A1	05-01-1995
			GB 2294814 A ,B	08-05-1996
			JP 8511924 T	10-12-1996
-----				
US 5444454	A	22-08-1995	NONE	
-----				
US 4521781	A	04-06-1985	NONE	
-----				
WO 0180258	A	25-10-2001	WO 0180258 A2	25-10-2001
-----				
WO 0171819	A	27-09-2001	US 2001049180 A1	06-12-2001
			WO 0171849 A2	27-09-2001
			WO 0171819 A2	27-09-2001
-----				

**This Page Blank (uspto)**